
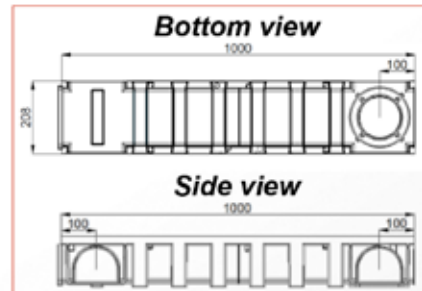
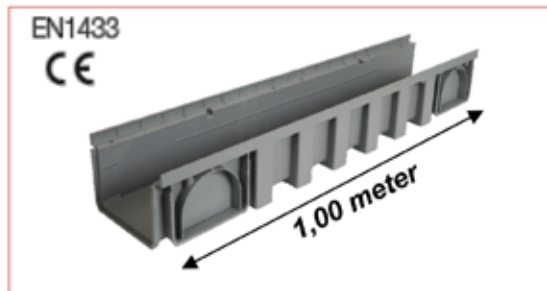



Connecto® I Channel – Outside width 200 mm - light grey

Code: CAN188

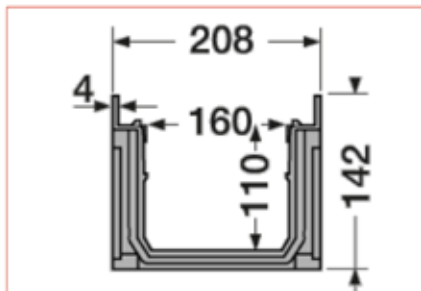

FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the marking, it can be used in private areas for all building applications, the environment of home, pedestrian areas, private car parks or car parking decks in class A15 or B125. 

DESCRIPTION:

This channel body is injected in light grey polypropylene with male/female interlocking system. The gratings GRL88 (grey) and GRL88S (sand) and the cover TR88 (grey) are suitable with this channel.

ACCESSORIES:

The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 100, 110 or 125: NAT188, NAV188 or NAX188
- vertical outlet Ø 100, 110 or 125: STCAN, SVCAN or SXCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV

CHARACTERISTICS:

Effective width: 160 mm
 Effective depth: 110 mm
 Hydraulic section: 176 cm²
 Weight: 1.8 kg



STCAN
 SVCAN
 SXCAN





NAT188
 NAV188
 NAX188



PSCVT
 PSCVV

IMPLEMENTATION:

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite for class A15
3. See the scheme opposite for class B125

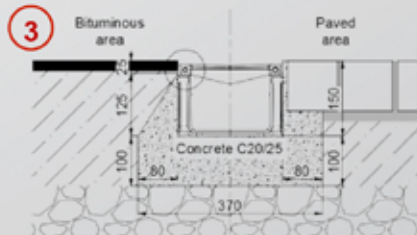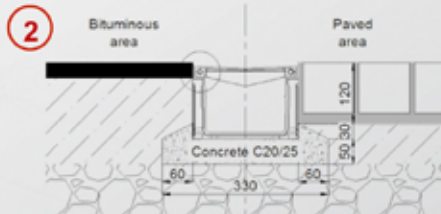

QUALITY - ENVIRONMENT:

ISO 9001
 ISO 14001
 ISO 50001
 BUREAU VERITAS
 Certification



DATE: July 2015