

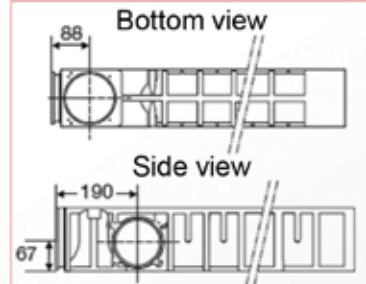
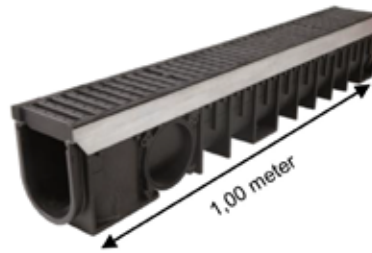


# Kenadrain I Channel 100mm wide with composite gratings class C250 – Height 2

Code: DR102CN

EN1433  
CE

## FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in public area in class C250.

## DESCRIPTION:

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- two composite gratings class C250
- 1 screw per grating on galvanized locking bar

STDR10  
SVDR10  
SXDR10NTDR102  
NVDR102PS100V  
PS100X

## ACCESSORIES:

To connect the channels to the underground network:

- end cap/end outlet Ø100 or 110 – NTDR102 or NVDR102
- lateral or vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X


## CARACTERISTICS:

Resistance class: C250  
 Effective width: 98 mm  
 Effective depth: 132 mm  
 Grating type: Composite  
 Drainage surface: 430 cm<sup>2</sup>/ml  
 Hydraulic section: 122 cm<sup>2</sup>  
 Opening dimensions: 11 / 98 mm  
 Weight: 7.8 Kg



## IMPLEMENTATION:

X = 150 mm; L = 440 mm  
 Z = 150 mm; Y = 90 mm; y = 85 mm

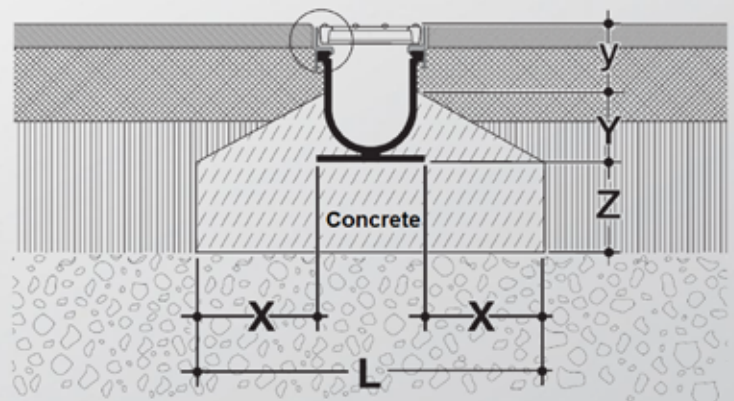

## QUALITY - ENVIRONMENT:

ISO 9001  
 ISO 14001  
 ISO 50001  
 BUREAU VERITAS  
 Certification



DATE: August 2014