



**Nicoll**
**DATA SHEET**



# **Connecto® I Shallow channel – Outside width 130mm - light grey**

Code: CAB773

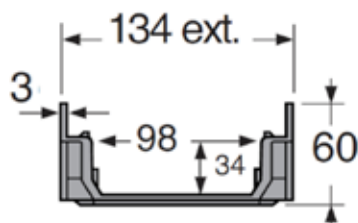

EN1433

CE

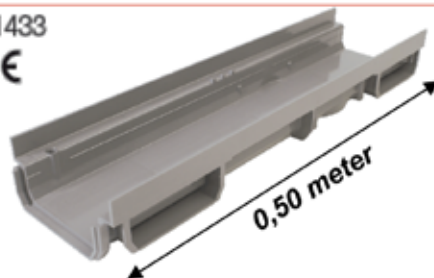

## **FUNCTION:**

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in private areas for all building applications, the environment of home, pedestrian areas, private car parks or car parking decks in class A15 or B125.

## **DESCRIPTION:**

This channel body is injected in light grey polypropylene with male/female interlocking system. The gratings GRL77 (light grey), GRL77S (sand), GRL77K (dark grey), GR77P (light grey), GR77PS (sand), GR77PB (white), GR77 (light grey) et GR77S (sand) are suitable with this channel.

## **ACCESSORIES:**

The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 40: NAH773
- vertical outlet Ø 100 or 110: STCAN or SVCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV

## **CHARACTERISTICS:**

Effective width: 98 mm  
Effective depth: 34 mm  
Hydraulic section: 33 cm<sup>2</sup>  
Weight: 0,6 kg





 STCAN  
SVCAN


NAH773


 PSCVT  
PSCVV

## **IMPLEMENTATION:**

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite for class A15
3. See the scheme opposite for class B125

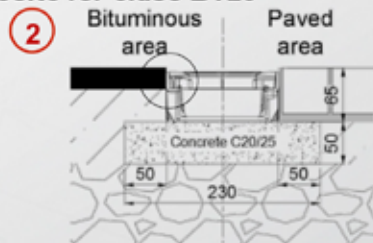

## **QUALITY - ENVIRONMENT:**

 ISO 9001  
ISO 14001  
ISO 50001  
BUREAU VERITAS  
Certification


DATE: August 2015

**Nicoll**

 Head office and Plants: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET Cedex  
Email : export.nicoll@alixis.com