



## RECYFIX®PRO 100

RECYFIX®PRO 100, class B 125, Type 95 with GUGI-Grating made of PA-GF, MW 15/25, black, locked

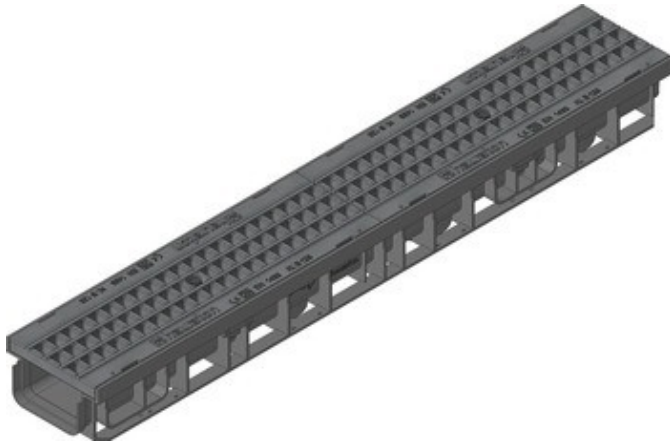

B 125

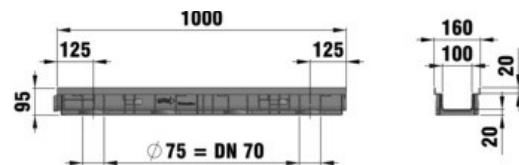

### ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Drainage cross-section cm <sup>2</sup>	Inlaying depth	Item-no.
1000	160	95	3,6	444	55	20	47033

### ■ Product description:

RECYFIX PRO 100 type 95, channel body made of recycled PE-PP, with integrated frame, acc. EN 1433, with horizontal connection possibility, with GUGI-Mesh grating made of PA-GF, MW 15/25, black, loading capacity B 125, L/W/H 1000x160x95 mm, item-no. 47033

### ■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** reinforced Polyamide

### ■ Type acc. DIN EN 1433:


M

### ■ Set of rules:

EN 1433

### ■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets



- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Access drives private