Nicoll | DATA SHEET

Connecto® I PVC grating for swimming-pool and pedestrians - white colour - class A15

Code: GR77PB

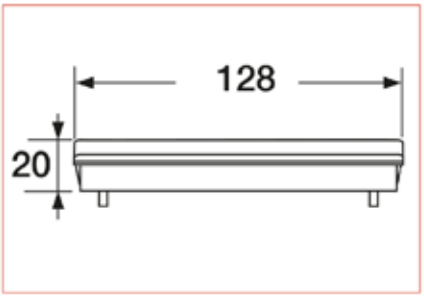

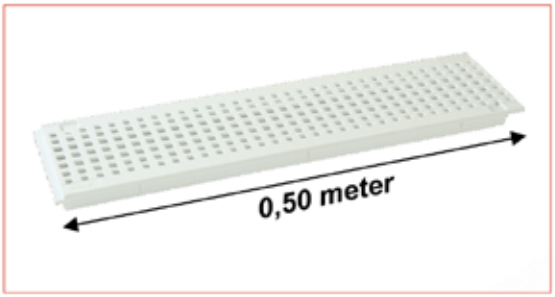

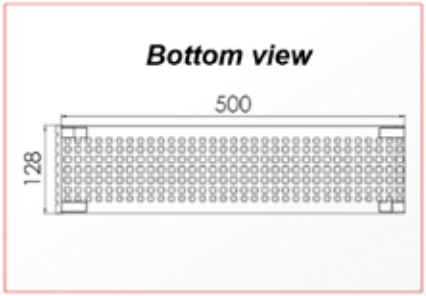

■ FUNCTION:

The grating is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in private areas for all building applications, the environment of home, parks and gardens in class A15.

■ DESCRIPTION:

This grating class A15 is injected in white PVC with anti-UV treatment.

■ ACCESSORIES:

This grating can be installed with these types of drainage channel:
- High channel body Connecto width 130: CAN177 and KCAN177N
- Shallow channel body Connecto width 130: CAB773, CABS773 and CAB133A
To fix a grating on CAB133A, it's necessary to use one FIXCAB13 (locking system with galvanized screw).
To fix a grating on CAN177, KCAN177N, CAB773 and CABS773, it's necessary to use two FIXCAN (set made up of one screw).

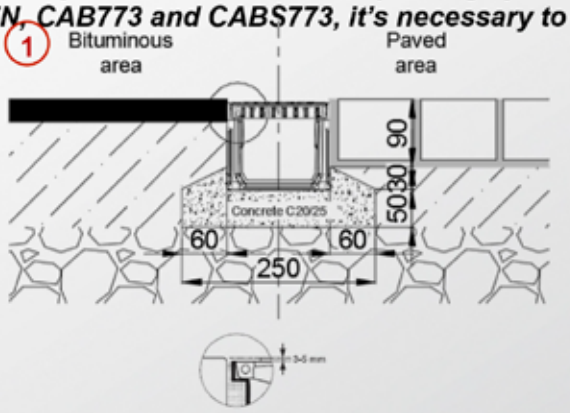

■ CHARACTERISTICS:

Resistance class: A15
Width: 128 mm
Length: 500 mm
Overall height: 20 mm
Grating type: PVC
Drainage surface: 232 cm²/ml
Opening dimensions: ≤ 8 mm
Weight: 0,5 kg

■ IMPLEMENTATION:

1. *See the installation scheme opposite with the channel CAN177 and KCAN177N.*
2. *See the installation scheme opposite with the channel CAB773 and CABS773.*
3. *See the installation scheme opposite with the channel CAB133A.*
4. *If you don't use Connecto channel, please leave a space between gratings to allow a free expansion.*

■ QUALITY - ENVIRONMENT:

ISO 9001
ISO 14001
ISO 50001
BUREAU VERITAS Certification

DATE: August 2015

Nicoll
Head office and Plants: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET Cedex
Email : export.nicoll@aliaxis.com

NON CONTRACTUAL DOCUMENT
an Aliaxis company