



# Connecto® I Channel - Outside width 130 mm - with composite gratings class B125

Code: CAN10BN



EN1433

CE

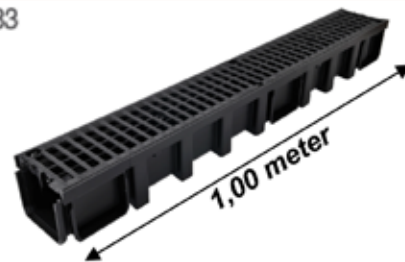

Bottom view



Side view



## FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in footways, pedestrian areas, private car parks or car parking decks in class B125.

## DESCRIPTION:

It consists of:

- an injected polypropylene body in black colour with male/female interlocking system
- two composite gratings class B125
- four black galvanized steel screws

## ACCESSORIES:


The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 100 or 110: NAT177N or NAV177N
- vertical outlet Ø 100 or 110: STCAN or SVCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV

STCAN  
SVCANNAT177N  
NAV177NPSCVT  
PSCVV

## CHARACTERISTICS:

Resistance class: B125  
Effective width: 98 mm  
Effective depth: 83 mm  
Grating type: Composite  
Drainage surface: 411 cm<sup>2</sup>/ml  
Hydraulic section: 81 cm<sup>2</sup>  
Opening dimensions: 15 / 18 mm  
Weight: 2,5 kg

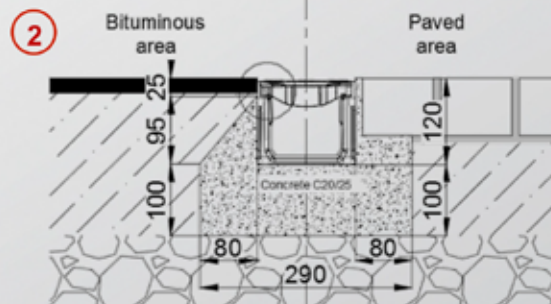

## IMPLEMENTATION:

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite

## QUALITY - ENVIRONMENT:

ISO 9001  
ISO 14001  
ISO 50001  
BUREAU VERITAS  
Certification



DATE: August 2015