



# RECYFIX®STANDARD 200

RECYFIX®STANDARD 200, class A 15, Type 100 with slotted grating, locked

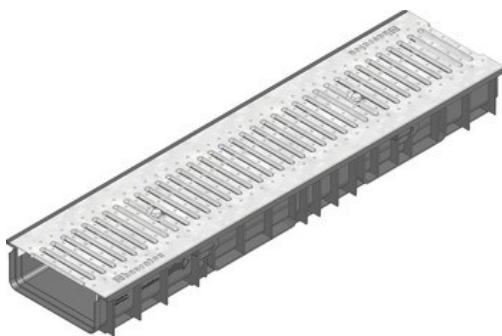

A 15

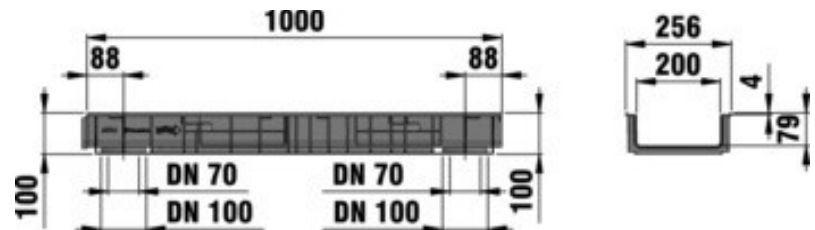

## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Drainage cross-section cm <sup>2</sup>	Inlaying depth	Item-no.
1000	256	100	5,426	390	150	21	40647

## ■ Product description:

RECYFIX STANDARD 200 Type 100 - Channel made of PE-PP-recycled plastic, acc. EN 1433, with vertical and horizontal connection possibility, with slotted grating, galvanised, with locking device, loading capacity A 15, L/W/H 1000x256x100 mm, item-no. 40647

## ■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Electrogalvanised steel
- **Locking handle:** Electrogalvanised steel
- **Grating:** strip galvanized steel

## ■ Type acc. DIN EN 1433:


M

## ■ Set of rules:

EN 1433

## ■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths



- School yards
- Underground car parks, multi-storey car parks
- Access drives private