



# RECYFIX®PLUS 100

RECYFIX®PLUS 100, class C 250, Type 80 with ductile iron grating SW 14 mm, black, locked

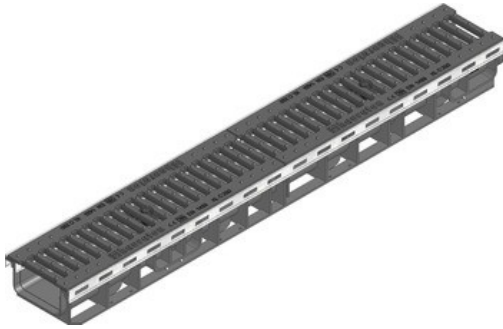

C 250

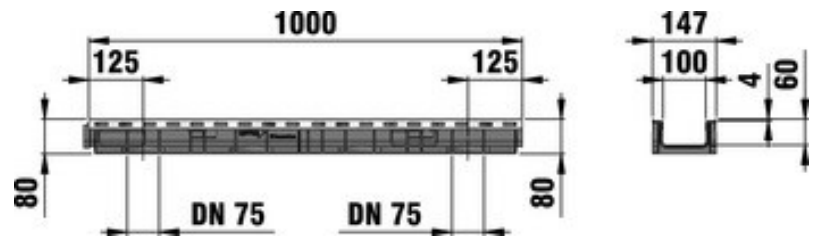

## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Drainage cross-section cm <sup>2</sup>	Inlaying depth	Item-no.
1000	147	80	7,95	450	55	14	40367

## ■ Product description:

RECYFIX PLUS 100 type 80 - channel made of modified PP, with integrated metal profil for the grating support , according to EN 1433, with vertical connection possibility DN/OD 75, with ductile iron grating made of spheroidal ductile iron GJS 500-7, slot width 80/14 mm, with horizontal thrust resistance and locking device, black, locked, loading capacity from A 15 - C 250, L/W/H 1000x147x80 mm, item no. 40367

## ■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Angle housing:** strip galvanized steel
- **Grating:** Ductile iron GJS 500-7

## ■ Type acc. DIN EN 1433:

M

## ■ Set of rules:

DIN 19580/EN 1433

## ■ Application areas:

- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping



- Market squares, markets
- Public areas and squares
- Car parking facilities
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Access drives private