

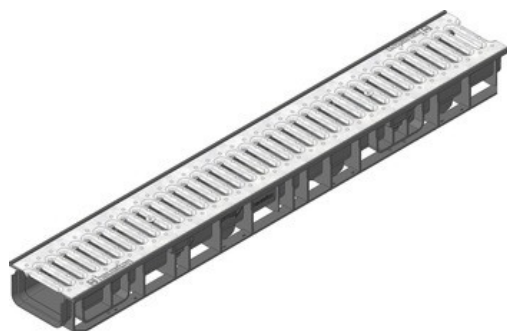


RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, trafficable, Type 80 with slotted grating SW 9 mm, locked*

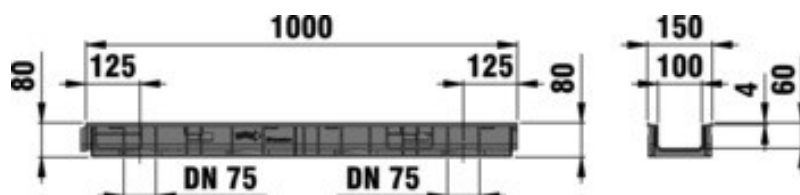

*Sustains
car traffic*



■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	150	80	3,498	280	55	3	40246

* More information can be found under www.hauraton.com

■ Product description:

RECYFIX STANDARD 100 type 80 - channel made of modified PP, according to EN 1433, with vertical connection possibility DN/OD 75, with slotted grating, with locking device, trafficable, galvanised, slot width 75/9, L/W/H 1000x150x80 mm, item no. 40246

■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Electrogalvanised steel
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** strip galvanized steel

■ Type acc. DIN EN 1433:

M

■ Set of rules:

DIN 19580/EN 1433

■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks



- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Underground car parks, multi-storey car parks
- Access drives private

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!