

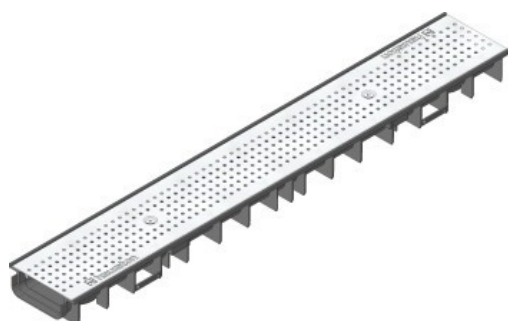


RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, class A 15, Type 60 with perforated grating "Elegance", stainless steel, locked*

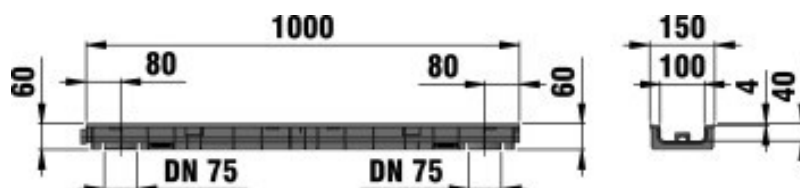

A 15



■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	150	60	2,946	102	35	3	41244

* More information can be found under www.hauraton.com

■ Product description:

RECYFIX STANDARD 100 type 60 - channel made of modified PP, according to EN 1433, with vertical connection possibility DN/OD 75, with perforated grating, stainless steel CNS 1.4301, Ø 6 mm, with locking device, loading capacity A 15, L/W/H 1000x150x60 mm, item no. 41244

■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Stainless steel 1.4301
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** Stainless steel 1.4301

■ Type acc. DIN EN 1433:

M

■ Set of rules:

DIN 19580/EN 1433

■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks



- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Underground car parks, multi-storey car parks
- Access drives private

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!