

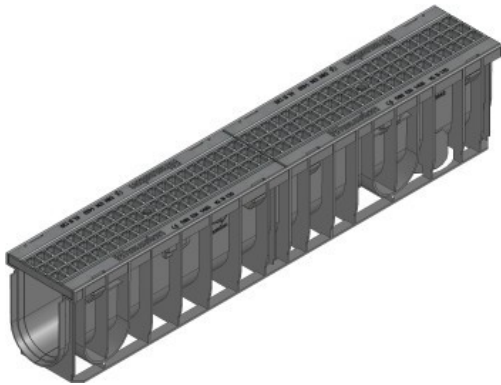


RECYFIX®PRO 100

RECYFIX®PRO 100, class B 125, Type 010 with GUGI-Grating made of PA-GF, MW 15/25 mm, black, locked, 1,0 m

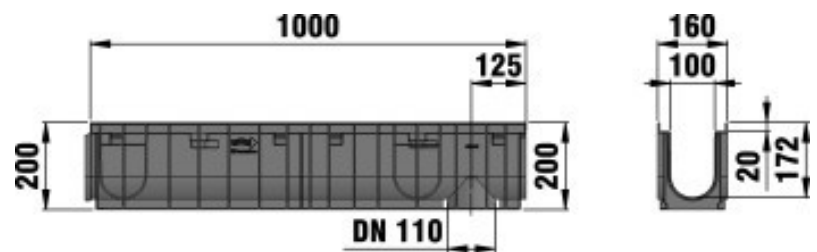

B 125



■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	160	200	4,655	444	142	20	47040

■ Product description:

RECYFIX PRO 100 type 010 - channel made of modified PP, with integrated angle housing, with vertical connection possibility DN/OD 110, with GUGI-mesh grating, mesh width 15/25, black, with horizontal thrust resistance and locking device, loading capacity from A 15 - B 125 according to EN 1433, L/W/H 1000x160x200 mm, item no. 47040

■ Material:



- **Channel body:** recycled, modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** reinforced Polyamide

■ Type acc. DIN EN 1433:

M

■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths



- School yards
- Access drives private

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!