


RECYFIX®STANDARD 150

RECYFIX®STANDARD 150, class A 15, Type 01 with slotted grating, galvanised, locked



A 15

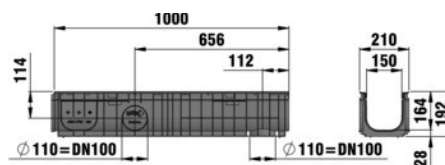

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Drainage cross-section cm ²	Inlaying depth	Item-no.
1000	210	192	5,2	390	225	21	40164

■ Product description:

RECYFIX STANDARD 150 Type 01 - Channel made of PE-PP-recycled plastic, according to DIN19580 / EN 1433, with vertical connection possibility, loading capacity A 15, with slotted grating, slot width 130/8, galvanised and with locking device, L/W/H 1000x210x192 mm, Item No. 40164

■ Material:

- **Channel body:** RECYFIX Material (recycled PP)
- **Bolts:** Electrogalvanised steel
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** strip galvanized steel

■ Type acc. DIN EN 1433:

M

■ Set of rules:

■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping
- Multi storey car parks
- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value



- Cycle paths and footpaths
- School yards
- Underground car parks, multi-storey car parks
- Access drives private