

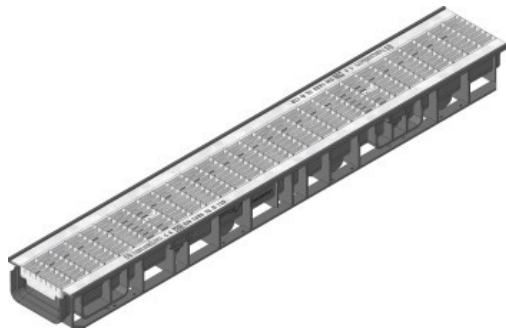


# RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, class B 125, Type 80 with mesh grating MW 30/10 mm, galvanised, locked, 1,0 m

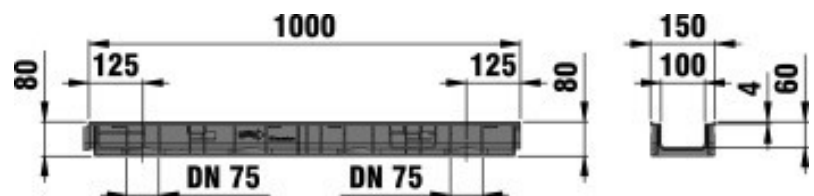

B 125



## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Internal channel cross-sect. cm <sup>2</sup>	Inlaying depth	Item-no.
1000	150	80	5,1	650	55	25	41226

## ■ Product description:

RECYFIX STANDARD 100 type 80 - channel made of modified PP, according to EN 1433, with vertical connection possibility DN/OD 75, with mesh grating, mesh width 30/10, galvanised, with locking device, loading capacity from A 15 - B 125, L/W/H 1000x146x80 mm, item no. 41226

## ■ Material:

- **Channel body:** recycled, modified Polypropylene
- **Bolts:** Electrogalvanised steel
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** hot-dip galvanised steel

## ■ Type acc. DIN EN 1433:

M

## ■ Application areas:

- Architecture and Design
- Stations and platforms
- Facades
- Flat roofs, terraces, balconies
- Public places
- Communal facilities
- Parks and gardens
- Underground parking
- Home and garden



The optimal use of the product in the aforementioned applications depends on various factors (positioning,

traffic load and frequency,...). Our experts will be happy to advise you!