



# RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, trafficable, Type 60 with mesh grating MW 30/10 mm, locked, 1,0 m\*

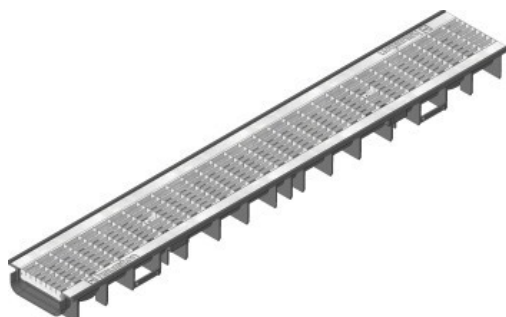

*Sustains  
car traffic*

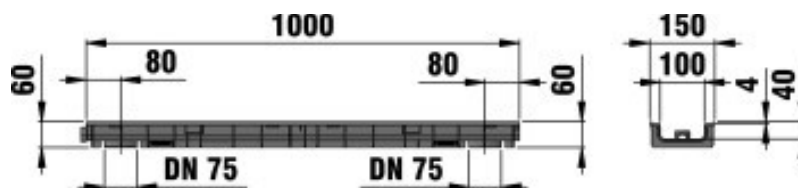

## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Internal channel cross-sect. cm <sup>2</sup>	Inlaying depth	Item-no.
1000	150	60	3,72	650	35	2	40237

\* More information can be found under [www.hauraton.com](http://www.hauraton.com)

## ■ Product description:

RECYFIX STANDARD 100 type 60 - channel made of modified PP, according to EN 1433, with vertical connection possibility DN/OD 75, with mesh grating, mesh width 30/10 and locking device, trafficable, galvanised, L/W/H 1000x146x60 mm, item no. 40237

## ■ Material:

- **Channel body:** recycled, modified Polypropylene
- **Bolts:** Galvanised steel
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** hot-dip galvanised steel

## ■ Type acc. DIN EN 1433:

M

## ■ Application areas:

- Architecture and Design
- Stations and platforms
- Facades
- Flat roofs, terraces, balconies
- Public places
- Communal facilities
- Parks and gardens
- Underground parking
- Home and garden



The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!

