



RECYFIX®PRO 100

RECYFIX®PRO 100, class C 250, Type 010 with FIBRETEC design slotted grating, SW 9 mm, in the colour black, locked, 1,0 m

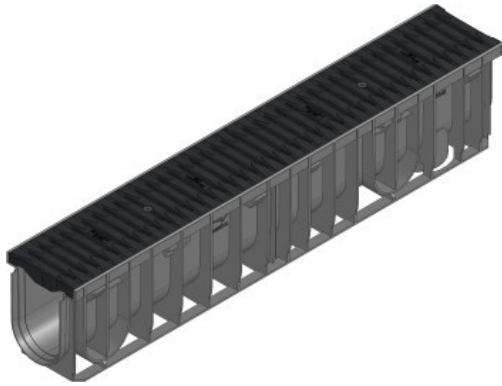

C 250

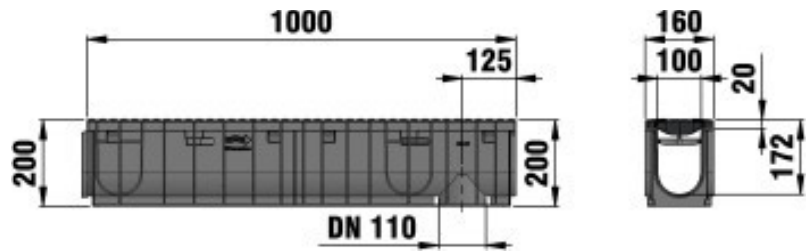

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	160	200	4,885	372	142	20	47060

■ Product description:

RECYFIX PRO 100 type 010 - channel made of modified PP, with integrated angle housing, with vertical connection possibility DN/OD 110, with FIBRETEC design slotted grating, slot width 9 mm, black, with horizontal thrust resistance and locking device, loading capacity from A 15 - C 250 according to EN 1433, L/W/H 1000x160x200 mm, item no. 47060

■ Material:

- **Channel body:** recycled, modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** reinforced Polyamide

■ Type acc. DIN EN 1433:

M

■ Application areas:

- Architecture and Design
- Bus stations and stops
- Facades
- Flat roofs, terraces, balconies
- Public places
- Communal facilities
- Parking lots
- Parks and gardens
- Home and garden



The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!