

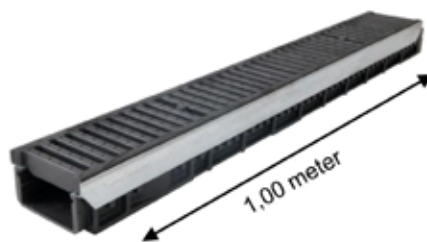



# Kenadrain I Park channel 100mm wide with composite gratings class C250

Code: DR100CN

EN1433  
CE

Bottom view

**FUNCTION:**

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in public area in class C250.

**DESCRIPTION:**

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- two composite gratings class C250
- 1 screw per grating on galvanized locking bar

**ACCESSORIES:**

To connect the channels to the underground network:

- end cap/end outlet Ø50 – NJDR100
- vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X

STDR10  
SVDR10  
SXDR10


NJDR100

PS100V  
PS100X**CARACTERISTICS:**

Resistance class: C250  
 Effective width: 98 mm  
 Effective depth: 51 mm  
 Grating type: Composite  
 Drainage surface: 430 cm<sup>2</sup>/ml  
 Hydraulic section: 47.5 cm<sup>2</sup>  
 Opening dimensions: 11 / 98 mm  
 Weight: 5.5 Kg

**IMPLEMENTATION:**

X = 150 mm; L = 430 mm  
 Z = 150 mm; y = 85 mm

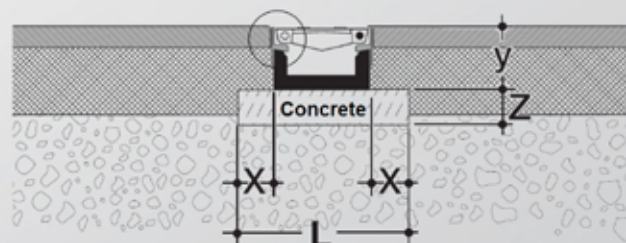**QUALITY - ENVIRONMENT:**

ISO 9001  
 ISO 14001  
 ISO 50001  
 BUREAU VERITAS  
 Certification



DATE: August 2014